



INTELLIGENT AUTOMATIC

Swing barrier

CF series is an automatic motorized stainless steel swing barrier, it has smallest installation footprint while offering widest opening clearance to allow big boxes, trolley, wheelchair, baby stroller or user with big luggage to pass through with comfort.

CF series swing barrier compact size and tubular shape allow it to easily fit into places with very limited space. Access control and time attendance reader can be integrated into top cover.

CF series swing barrier design is simplified to achieve optimum function at more affordable cost. Control system mechanism is modular for easy maintenance servicing and part replacement.

CF series swing barrier is typically used together with flap barrier or turnstile as manual lane for handicapped user in building lobby. Ideal for low traffic and light duty site that requires an affordable solution.

**Premium
Automation**

MODEL


S4T238SW Series



TECHNICAL SPECIFICATION:

Description	Parameters
Lane Width	900-910mm
IP	IP54
Pass Speed	25-30 persons/min
Power supply	AC220V/110V,50/60Hz
Drive Mode	Motor drive
Max Power Consumption	200W
Opening time	0.06S
Humidity	≤90% coagulation free
Noise	≤50dB
Service Life	3,000,000 cycles
Outside packing	145x110x360cm
Working Environment	-20° C~+60° C
Gross Weight	85KGS

DIMENSION:

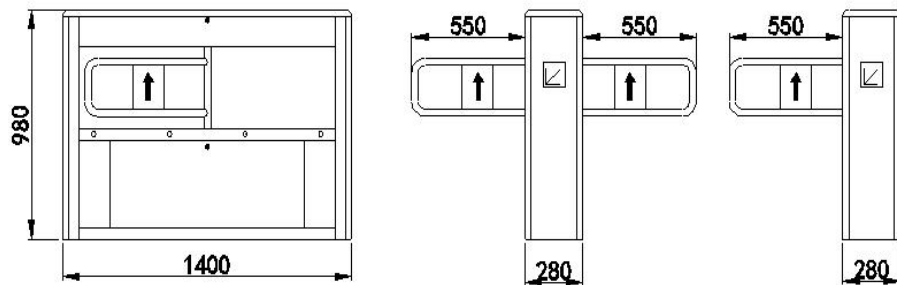

Features:

1 RELIABILITY

Patented compact mechanism ensures the long life of the lubricating oil inside and high quality electrical components.

2 WIDEST OPENING

Compared to tripod turnstile and flap barrier, swing barrier allow widest opening clearance. SWB100 slim form factor only take up minimum space from passage clearance space. 2 unit swing barrier can be installed on same lane to give maximum clearance 910 mm (inclusive 10 mm clearance).

3 CUSTOMIZE OPENING

Swing barrier allow customizable opening. The wing can be cut short according to clearance available at site to achieve perfect fitting. Control system will auto synchronize both swing barrier installed in the same lane. Both swing barrier will open and close at the same time.

4 EASY INTEGRATION

A push button or access control reader can be used to trigger the swing barrier to open via simple dry contact signal. After delay timer elapsed, swing barrier will automatically close back by itself.

5 DOUBLE SAFETY

Optional IR sensor can be installed to auto reverse the gate if obstacle is detected during closing. This prevent the closing gate to hit user that is still in the lane passage.

6 EMERGENCY RECOVERY


During power failure, swing barrier will automatically open for free pass through. This will fast escape in the event of emergency. When the power resume, swing barrier will automatically close back.

Swing Barrier

Different type

Swing barrier can be divided into one wing swing barrier and double wings swing barrier.


One wing swing barrier, only with one wing on the housing, one channel combined by two pieces one wing swing barrier

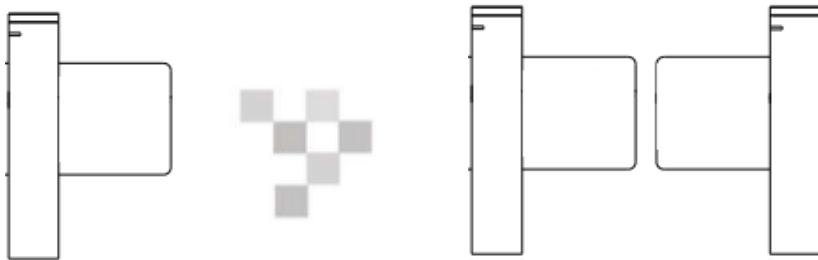


Mechanism&Drive board

Heavy-duty design for 24 hours continuous application, 3 million times or above test.

High durability with industrial parts. Running is quiet without any noise&shock.

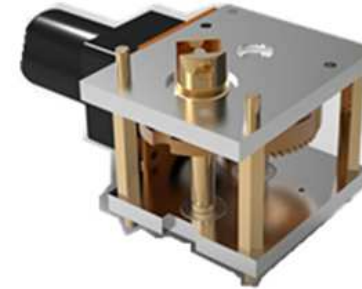


Double wings swing barrier, with two wings on the housing, two channels combined by one piece double wings swing barrier with two pieces one wing swing barrier.

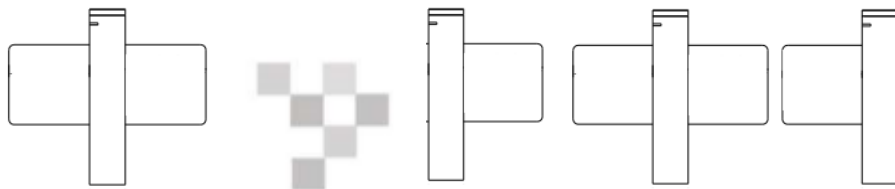

Self designed drive board adopts original Mitsubishi drive module.

Capatitable with 3A-15A current.

Over heat and overload dual protection.

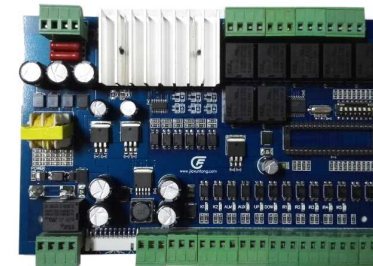

Status And Direction Light Indication

Green Arrow indicates that the turnstile is unlock to permit a passage and shows the direction of authorized passage;

Red Cross indicates that passage is not allowed and shows that the turnstile remains in locked status.



Control Over Turnstile

From the remote control panel or a wireless remote control(in the pulse control mode).

From access control system via a controller (in either pulse or potential control mode).

The turnstile is a normally closed unit(N/C),it remains unlocked until it receives a valid authorization or is unlocked with a mechanical release key.

If integrated into a fire alarm system,the turnstile can also be automatically unlocked by fire alarm signal.

Operating Modes

Single passage in the set direction(the turnstile is open for one passage in the permitted direction and closed in the opposite direction).

Bi-directional single passage(the turnstile is open for one passage in each direction).

Free passage in the set direction(the turnstile is open for multiple passages in the permitted direction and closed in the opposite direction).

Free passage in the one direction,single passage in the opposite direction(the turnstile is open for multiple passages in the permitted direction and one passage in the opposite direction).

Always free(the turnstile is open for entry and exit).

Always locked(the turnstile is closed for entry and exit).

Housing Optional



**S4T238SW -BY
BB**

S4T238SW -



**S4T238SW -BX
BJ**

S4T238SW -



Materials

Turnstile Housing: high quality powder coating steel or stainless steel
Wing : acrylic or PMMA

Timeout Facility

The turnstile has a preset timeout period(the passage waiting time) when the turnstile is unlocked to allow a passage in the permitted direction.

A timed auto re-lock if the passage has not begun (if not rotated) over this period is a standard feature.

The passage waiting time in the pulse control mode is 5 seconds regardless of the control signal duration. In the potential mode the passage waiting time is equal to the control signal duration.

Interface

"Fire Alarm" control input to unlock the turnstile when an appropriate signal is received from fire alarm system or emergency button.

Relay outputs to connect remote light indicators, an intrusion detector, a siren and an emergency unlocking device.

Galvanic decoupling of the outputs to ensure noise-immunity of the turnstile electronic.

The logic is protected against short circuits, overloads and polarity inversion.

Warranty

The warranty period is 12 months commencing from the date of sale.

Housing Optional



S4T238SW -B1

S4T238SW -B0



S4T238SW -BXG

S4T238SW -BXJ

